



TINT-O-LITE

Reg. U. S. Pat. Off.

(CASEIN PASTE PAINT)

The **H.B.DAVIS COMPANY**
BALTIMORE, MD.

Tint-O-Lite

Reg. U. S. Pat. Off.

DIRECTIONS

Use galvanized containers for mixing; do not use wooden containers. Transfer contents of this can to galvanized pail of suitable size and add luke warm water at the rate of $\frac{1}{2}$ gallon per gallon of paste. Add water slowly with constant stirring until a uniform mixture is obtained. Paint should be strained to remove any possible lumps. Keep the mixed paint covered with a damp cloth when not in use. It should be used within a week after mixing.

Surface should be clean and free from grease before paint is applied. Remove any loose or scaling paint by wire brushing. Wash off any glue size, calsomine or cold water paint with a sponge and warm water. This paint may be applied directly to wall board, brick, stone, hollow tile, concrete or plaster, even if green, without sizing provided the surface is not unduly absorptive or has unequal suction; otherwise it is best to prime with Davis Fres-Co-Lite Pigmented Primer as a more uniform finish will be obtained and the Tint-O-Lite will cover a much larger area per gallon.

Use an 8 to 10 inch Calsomine brush on large surfaces or a 4 inch wall brush on smaller surfaces. The paint dries rapidly, so paint small sections at a time, starting each section before the previous one has dried. This will prevent lapping.

We do not recommend the use of dry colors for tinting, because it may result in a streaky job. Colors other than shown on color card may be obtained by intermixing.

If surfaces painted with Tint-O-Lite become soiled they may be cleansed by gentle washing with a soft sponge dipped in cold water in which white soap chips have been dissolved. Washing should not be attempted within 30 days after application of the paint.

The spreading rate varies between 350 and 700 sq. ft. to the gallon of paste depending on the surface.

For Beauty and Economy

Tint-O-Lite is a modern type paste paint for use on walls and ceilings of houses, apartments, industrial and chemical plants, shops, etc. It can be applied directly to concrete or plaster even when damp.

Tint-O-Lite permits one day painting because it dries to touch in about an hour. This is of particular advantage to the home owner or shop keeper as the disarrangement of rooms is kept to a minimum. It is also non-inflammable and odorless.

It requires no special sizing coat.

Tint-O-Lite is unusually economical because water is used as a thinner. The material comes in paste form, thus the final consistency may be adjusted somewhat to suit the particular condition on the job.

Unlike most materials of this kind, Tint-O-Lite is snow-white in color, and will frequently be found to cover 25 to 30 percent more surface per gallon.

It flows very freely, and under the brush does not have the watery "feel" of other paints of this type. Edges will stay wet longer, thus permitting easier lapping.

Ten modern pastel shades are available and each has been selected to harmonize with interior furnishings and decorations.

The user of this material will be rewarded with a very economical yet serviceable and beautiful result.


ALSO MADE IN WHITE AND BLACK

Tint-O-Lite


Reg. U. S. Pat. Off.




IVORY

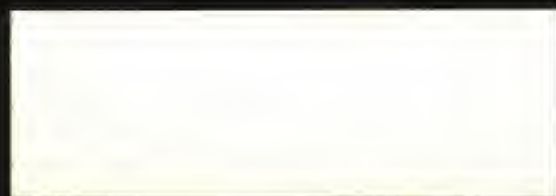

ROSE

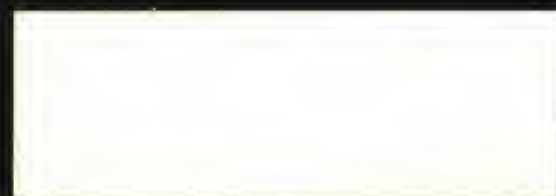

CREAM

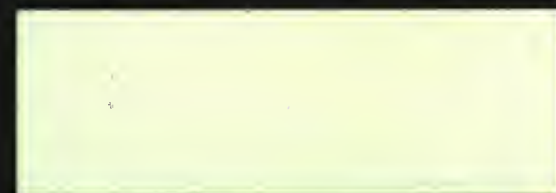

GREEN



BUFF

Tint-O-Lite

Reg. U. S. Pat. Off.



GRAY



BLUE



TAN



ORCHID



AZURE

The H.B. DAVIS COMPANY
BALTIMORE, MD.



(CASEIN PASTE PAINT)

Reg. U. S. Pat. Off.

TINT-O-LITE





Digitized by



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL

www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

[//archive.org/details/buildingtechnologyheritageli](http://archive.org/details/buildingtechnologyheritageli)

From the collection of:

Jablonski Building Conservation
www.jbconservation.com

BALTIMORE, MD.